



# PEGASO

ombrellone 20 spicchi | 20-segment beach umbrella  
Sonnenschirm mit 20 Segmente



### IT



- asta in alluminio anodizzato Ø 40 mm
- giunto a baionetta
- componenti in nylon
- appendiabiti intercambiabili
- **10** stecche in acciaio zincate e verniciate bianco Ø 5 mm
- copertura 20 spicchi
- tessuto e bordo in acrilico tinto in massa
- borchie antistrappo

### EN

- anodized aluminium pole Ø 40 mm
- bayonet joint
- nylon components
- interchangeable coat hook
- **10** zinc-plated and white varnished steel ribs Ø 5 mm
- 20-segment canvas
- "solution dyed acrylic" fabric and border
- tear-proof studs

### DE

- Mast aus eloxiertem Aluminium Ø 40 mm
- Bajonettverbindung
- Nylonbestandteile
- auswechselbare Kleiderhaken
- **10** Streben aus verzinktem und weißlackiertem Stahl Ø 5 mm
- Bespannung mit 20 Segmente
- Stoff und Saum aus düsengefärbter Acrylfaser
- reißfeste Ziernägel



	A	B			C1	C2	C3		
	without flounce	flounce		windproof chimney	PVC cover	110 cm	plate "guscio" column and joint	80 cm	base art. B23-B24 p. 53
Ø 180 cm			art. PE18		(130 cm)				(35 kg)
Ø 200 cm			art. PE20		(130 cm)				(35 kg)
Ø 220 cm			art. PE22		(130 cm)				(35 kg)
Ø 240 cm			art. PE24		(160 cm)				(55 kg)

	A	B	C	D	E					
	Ø 40 mm						packing - volume		packing - volume	
Ø 180 cm	140 cm	96 cm	16 cm	177 cm	168 cm	kg. 4,90	pz. 4	m³ 0,11	pz. 50	m³ 1,41
Ø 200 cm	140 cm	91 cm	16 cm	197 cm	186 cm	kg. 5,30	pz. 4	m³ 0,11	pz. 50	m³ 1,41
Ø 220 cm	140 cm	91 cm	16 cm	212 cm	200 cm	kg. 5,70	pz. 4	m³ 0,11	pz. 50	m³ 1,41
Ø 240 cm	140 cm*	89 cm	16 cm	234 cm	208 cm	kg. 6,00	pz. 4	m³ 0,11	pz. 50	m³ 1,41

\* Asta h. 150 cm senza snodo\*\* per ombrellone Ø 240 cm


\* Pole h. 150 cm without tilt\*\* for umbrella Ø 240 cm

\* Mast h. 150 cm ohne Gelenk\*\* für Sonnenschirm Ø 240 cm

telaio - 10 stecche  
frame - 10 ribs  
Gestell - 10 Streben



sistema di apertura/chiusura  
opening/closing system  
Öffnung/Schließung System



cerniera  
hinge  
Scharnier



borchie antistrappo  
tear-proof studs  
reißfeste Ziernägel



\*\* snodo  
\*\* tilt  
\*\* Gelenk




camino antivento  
wind-proof chimney  
Windkamin



details and accessories for | Details und Zubehör für | pegaso and poseidon

# BEACH

campioni di tessuti e bordi  
samples of fabrics and borders  
Stoffe und Säume Muster

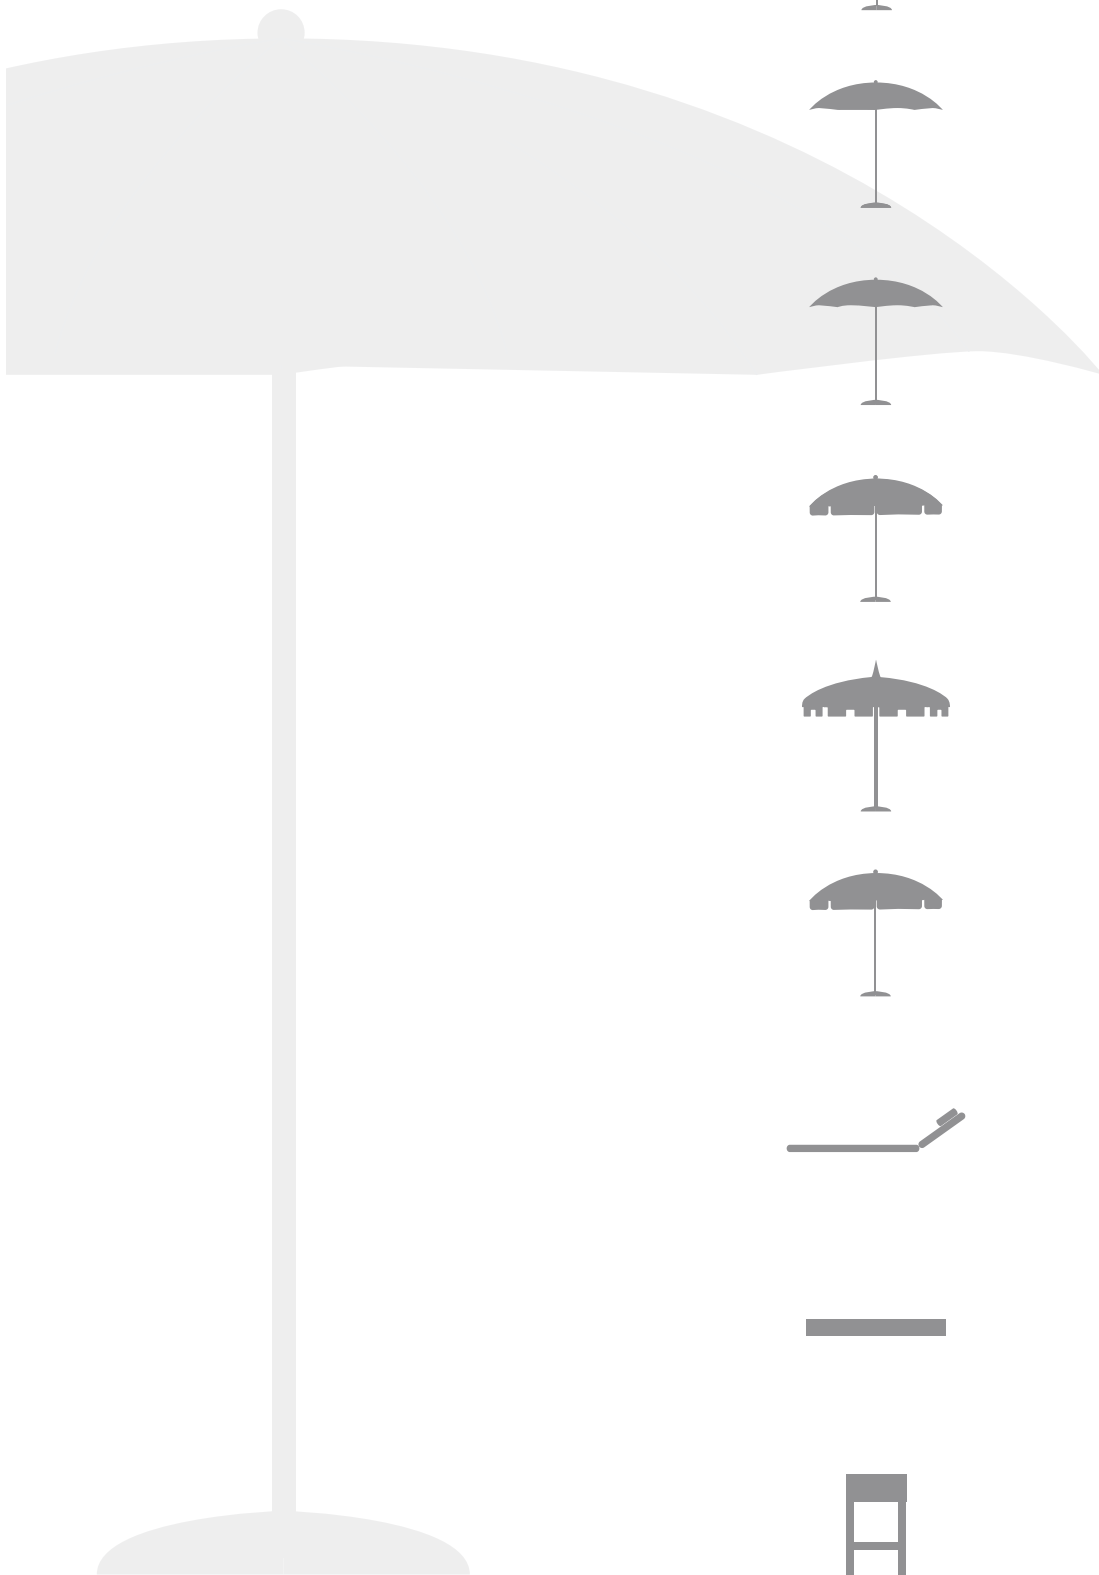

EOS



CRONO



ZEFIRO



NARCISO



PEGASO



POSEIDON



PAGODA



CARIDDI



ICARO



DEDALO



FEBE




campioni di tessuti | samples of fabrics | Stoffe Muster



am6/20




am6/16

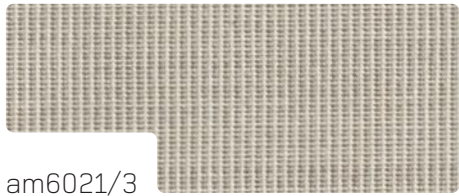

am6021/3



am6/411

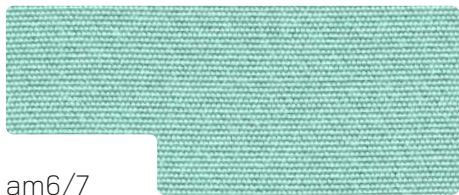


am6/7



am6/62



am6/162

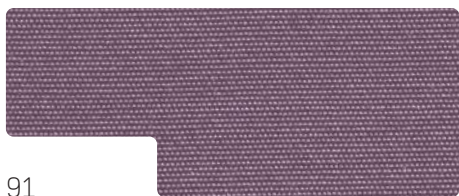


91




7



am6/10

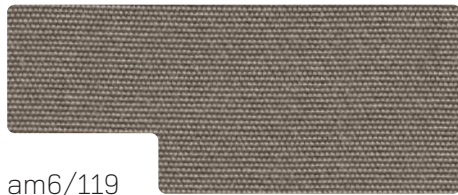


am6/119

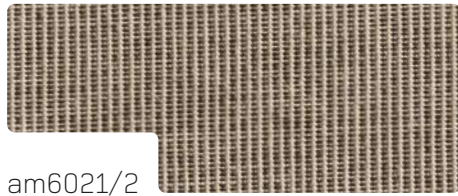

am6021/2




am6/11

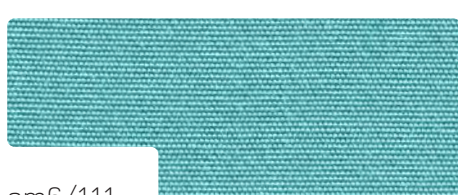


am6/111



am6/1

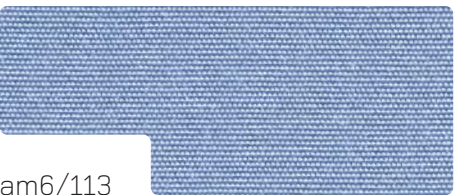

am6/113

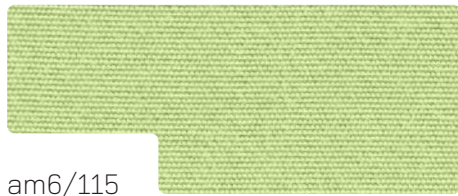


am6/115



am6/5



15/1

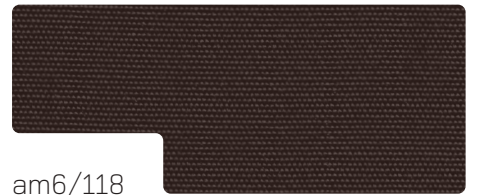

am6/118



am6021/1




am6/100




am6/34



am6/112

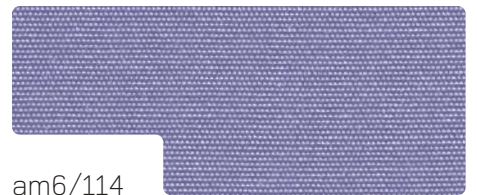

am6/114

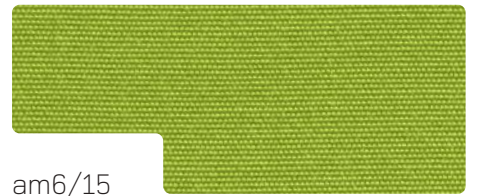


am6/15




am6/55



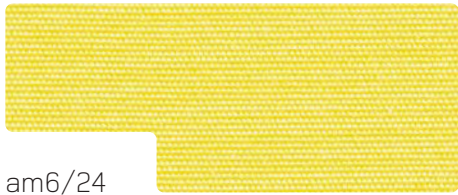

am6/24

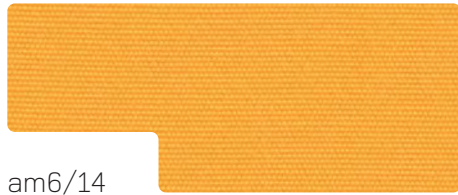


am6/14




am6/4



am6/43

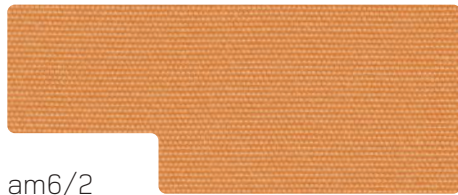

am6/2

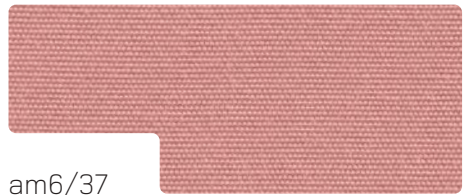

am6/37



am6/29




am6/9




am6/17




15



93



15/1



52



926



81




79




94




97




71




77

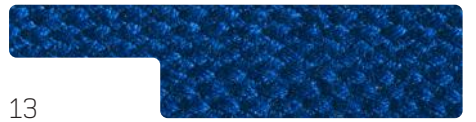

13




10



87




75




74




91



16



7



8



5



12



72



55



54



20



11



56



73



24

campioni di bordi | samples of borders | Säume Muster

# TECHNICAL DATA - BEACH



Composizione Fibre analysis	100% fibra acrilica tinta in massa 100% Solution dyed acrylic fabric
Costruzione Construction	ordito 27 fili/cm - trama 14 fili/cm warp 27 threads/cm - weft 14 threads/cm
Titolo Yarn number	ordito mN 2/34 - trama mN 2/34 warp mN 2/34 - weft mN 2/34
Altezza Width	116/140/152 cm 116/140/152 cm
Peso Weight	260 g/m <sup>2</sup> 260 g/m <sup>2</sup>
Finissaggio (trattamento Cleangard) Finishing (Cleangard treatment)	morbido e idro-oleorepellente soft finishing, water and oil repellent
Resistenza all'abrasione (UNI EN ISO 5470-2:2004) Rubber test (UNI EN ISO 5470-2:2004)	> 20.000 cicli > 20.000 cycles
Resistenza alla luce (UNI EN ISO 105-B02:2014) Colour fastness to light (UNI EN ISO 105-B02:2014)	7/8 7/8
Resistenza alle intemperie (UNI EN ISO 105-B04:2000) Colour fastness to weather condition (UNI EN ISO 105-B04:2000)	7/8 7/8



don't iron



don't bleach



dry cleaning is not allowed



only cold washing is permitted



cold hand washing is permitted



don't use pressure-washer

